AC 4DR 4.5″ Downlight - Round

AGILE-CORE®
Distributed Edge Architecture

PROJECT:	QTY:
TYPE:	CATALOG:

SPECIFICATIONS:

Housing	Die-cast aluminum trim housing with forged aluminum heat sink. Swing-out mounting arms field adjust for ceiling thickness from 1/2″ – 2-3/8″.
Open Reflector	Low-iridescent anodized aluminum. Clear semi-specular finish standard.
Lensed Trim	Die-cast aluminum frame with micro-prismatic, acrylic lens. Diffuse acrylic lens standard with A Trim Type.
Electrical	High-performance Class 2 C.O.B. LED array. Reported L70>55,000 hours. Reported L90>55,000 hours. Estimated L70 = 200,000 hours. Lowvoltage DC fixture, to be fed by Class 2 power supply. Tunable White products use LEDs of multiple CCTs and may produce a perceptibly different shade of white from single-CCT products at the same CCT. All CCTs are within 3 MacAdam ellipses.
Mounting	Recessed. 20 ga. galvanized steel mounting pan for new construction or IC-rated enclosure. Minimum 12-1/2″ O.C. marked spacing required for P15 static white (S Distribution only), P20 and P23 static white, P12 and P15 tunable white lumen packages when specified with R Mounting Type. Nodes cannot be mounted above hard ceilings.
Listings	• cCSAus conforms to UL STD 1598; Certified to CAN/CSA STD C22.2 No. 250.0 for dry and damp locations. LED light assembly conforms to UL 2108 for remote installation. • Suitable for wet location under covered ceiling when specified with WET/CC option or F trim type. • IC-rated for direct contact with insulation when specified with I Mounting Type. • City of Chicago Environmental Air approved when specified with CP option. • Complies with ASTM-E283 when specified with ATH option. • RoHS compliant. • Complies with the Buy American Act and other federal regulations.
Warranty	5-year limited warranty

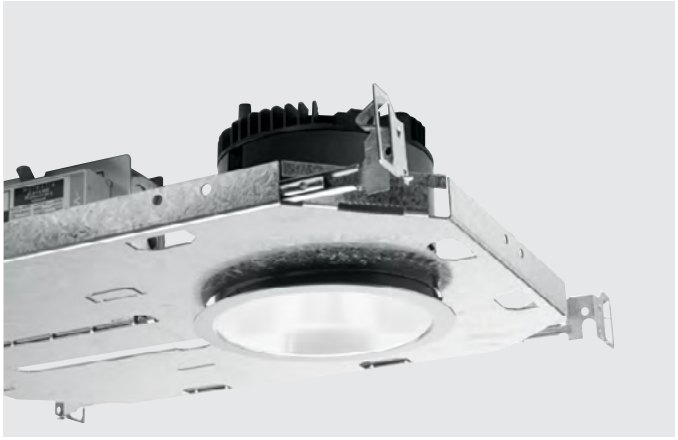

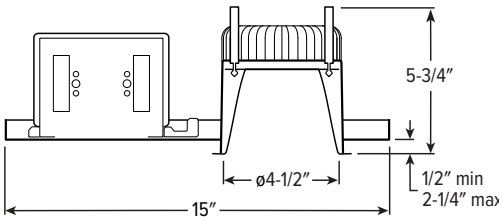

P15 – P44 Lumens shown

FEATURES:

- Maximum energy savings with efficacies up to 102 lm/W
- No in-luminaire drivers extending fixture life, using less materials and lowering costs
- Daisy chain multiple fixtures per home run
- Made in the USA

CERTIFICATIONS

C SP US · BAA · MADE IN USA · BABA · RoHS · TAA Compliant

WET/CC · CCEA Approved

©2026 Sinclair Digital Services, Inc. | 817.255.4015 | www.sinclair-digital.com
Specifications subject to change without notice. All trademarks, product names, logos, and brands mentioned are the property of their respective owners. Use of these trademarks does not imply endorsement or affiliation. Rev 10/20/26

AC 4DR 4.5″ Downlight - Round

AGILE-CORE®
Distributed Edge Architecture

ORDERING GUIDE:

Example Catalog # AC 4DR P38/835 FL OW OF CS MWT N F1

Family	Lumens[1]	/ CRI	CCT	Pwr/Control[2]	Options	Trim Type[6]	Distribution
AC 4DR	**P10** 981lm **P12** 1251lm **P18** 1771lm **P24** 2396lm **P38** 3795lm **P60** 6026lm	**8** 80[3] **9** 90	**27** 2700K **30** 3000K **35** 3500K **40** 4000K **50** 5000K **TW** Tunable White (90 CRI, 2700K-5000K)[4]	**FL** flying leads AGILE-CORE™ ready	**ATH** Airtight construction **CP** Chicago plenum (CCEA)[5]	**O** Open reflector **F** Open reflector with frosted top diffuser[7] **L** Flush lens **R** Regressed lens **A** Angled lens[8]	**W** Wide **M** Medium **N** Narrow[9] **S** Narrow spot[10] **WW** Wall wash[11]

Flange Type	Reflector Finish	Trip Options	Mounting[18]	Mounting Hardware[19]
OF 1/2” standard flange **ZF** Zero-flange mud in[12]	**OPEN TRIM TYPES** **CS** Clear semi-specular anodize **SG** Satin glow anodize **GD** Gold anodize **CG** Champagne gold anodize **PW** Pewter anodize **SPC** Clear specular anodize **RG** Rose gold anodize **WH** White texture powder coat **BL** Black texture powder coat **LENS TRIM TYPES** **CS** Clear semi-specular powder coat **WH** White texture powder coat **BL** Black texture powder coat **MB** Black texture splay with white flange[13]	**MWT** Smooth matte white trim flange[14] **AD** Diffuse acrylic lens[15] **PD** Diffuse 1/8″ polycarbonate lens[16] **WET/CC** Wet location, covered ceiling listed **AM** Anti-microbial[17]	**N** Open pan for new construction **I** IC-rated enclosure for new construction[20] **R** Remodel Kit[21]	**F1** Integral 2-position fixed pan bracket, universal bar hanger included[22] **BA1** Adjustable butterfly pan bracket, bar hanger not included[23] **CA1** Adjustable catepillar pan bracket, universal hanger included[24]

1 Lumen output based on O Trim Type, W Distribution, and CS Reflector Finish, 80 CRI/3500K for single CCT and 90 CRI/4000K CCT for TW. Actual performance may vary +/-5%, see page 2 for FIXTURE PERFORMANCE DATA.
2 For additional PoE connection details, consult factory.
3 Not available with tunable white.
4 P15 lumen package max with W, M, and WW Distributions. P12 lumen package max with N Distribution. Not available with S Distribution.
5 I Mounting Type required.
6 Trim ships separately
7 WET/CC standard.
8 Available with WW Distribution only.
9 When specified with L or R Trim Type: P20 static white and P12 tunable white lumen packages max for N and R Mounting Type, P12 static white and P7 tunable white lumen packages max for I Mounting Type.
10 Static white only. P15 lumen package max for N and R Mounting. P12 lumen package max for I Mounting. Not available with 950 CRI/CCT.
11 A Trim Type only.
12 For use with mud-in plaster construction only, supplied with mud flange installation kit. See page 4 for TRIM TYPE DETAILS. Not available with O Trim Type or ATH Option.
13 R Trim Type only. Not available with ZF Flange Type or MWT Trim Option.
14 Not available with L Trim Type, ZF Flange Type or WH Reflector Finish.
15 W Distribution only. Not available with O or F Trim Types.
16 W and WW Distributions only. Not availabe with O or F Trim Types.
17 WH and BL Reflector Finishes only.
18 Mounting hardware required (N and I only), ordered separately, see MOUNTING HARDWARE ordering info. See page 5 for MOUNTING TYPE DETAILS.
19 Additional mounting hardware options available. See page 5 for MOUNTING HARDWARE DETAILS.
20 P15 static white and P9 tunable white lumen packages max.
21 Also used in new construction sheetrock ceilings. Pan-less installation.
22 N and I Mounting Types only. I Mounting requires external brackets.
23 N Mounting Type only.

©2026 Sinclair Digital Services, Inc. | 817.255.4015 | www.sinclair-digital.com
Specifications subject to change without notice. All trademarks, product names, logos, and brands mentioned are the property of their respective owners. Use of these trademarks does not imply endorsement or affiliation. Rev 10/20/26

AC 4DR 4.5″ Downlight - Round

AGILE-CORE®
Distributed Edge Architecture

PERFORMANCE TABLE

AC 4DR (OPEN REFLECTOR)

LED	Distribution	Delivered Lumens	Wattage	Efficacy (lm/W)	LED Channels	LED Vf max (V)	LED If max/ch (mA)
P10	W	981	7.5	131	1	34	225
	M	955	7.5	127	1	34	225
	N	956	7.5	127	1	34	225
P12	W	1251	10	125	1	34	294
	M	1240	10	124	1	34	294
	N	1241	10	124	1	34	294
P18	W	1771	15	118	1	35	433
	M	1772	15	118	1	35	433
	N	1774	15	118	1	35	433
P24	W	2396	20	120	1	34	592
	M	2360	20	118	1	34	592
	N	2295	20	115	1	34	592
P38	W	3795	30	127	1	36	979
	M	3686	30	123	1	36	979
	N	3476	30	116	1	36	979
P60	W	6026	50	121	2	36	1425
	M	6015	50	120	3	36	1425
	N	6020	50	120	4	36	1425

*Angled lens trim

©2026 Sinclair Digital Services, Inc. | 817.255.4015 | www.sinclair-digital.com
Specifications subject to change without notice. All trademarks, product names, logos, and brands mentioned are the property of their respective owners. Use of these trademarks does not imply endorsement or affiliation. Rev 10/20/26

AC 4DR 4.5″ Downlight - Round

AGILE-CORE®
Distributed Edge Architecture

MULTIPLIER TABLE

	Color Temperature		
	CCT	Lumens	
		Standard	Tunable White
80 CRI	2700K	0.92	0.83
	3000K	0.98	1.00
	3500K	1.00	0.99
	4000K	1.01	1.00
	5000K	1.02	0.98
90 CRI	2700K	0.76	-
	3000K	0.79	-
	3500K	0.82	-
	4000K	0.84	-
	5000K	0.88	-

	Reflector Finish	
	Catalog Number	Conversion Factor
0 Trim	CS	1.00
	SG[1]	0.92
	GD	0.93
	CG	0.96
	PW	0.86
	SPC	1.02
	RG	0.88
	WH[1]	0.89
	BL[1]	0.47
R Trim	WH	1.00
	CS	0.98
	BL	0.79

Trim Options	
Catalog Number	Conversion Factor
F	0.75
S	0.85
AD	0.85
PD	0.85
WET/CC	0.85

BEAM ANGLE

	Trim Type[2]			
	O	F	L	R
W	65°	60°	50°	50°
M	45°	50°	35°	30°
N	10°	25°	25°	25°

1 Distribution will also be affected, consult factory.
2 Beam angle based on CS or WH Reflector Finish.
- Photometrics tested in accordance with IESNA LM-79. Results based on O Trim Type, W Distribution and CS Reflector Finish, static white 3500K/80 CRI or tunable white 4000K/80CRI, and 25°C ambient temperature. Actual performance may vary +/-5%
- Use multiplier tables to calculate additional options.

PHOTOMETRY

OPEN (O)


65° Wide


45° Medium


10° Narrow


Wall Wash

OPEN TOP DIFFUSER (F)


60° Wide


50° Medium


25° Narrow

FLUSH (L)


50° Wide


35° Medium


25° Narrow

REGRESSED (R)


50° Wide


30° Medium


25° Narrow

ANGLED (A)


Wall Wash

©2026 Sinclair Digital Services, Inc. | 817.255.4015 | www.sinclair-digital.com
Specifications subject to change without notice. All trademarks, product names, logos, and brands mentioned are the property of their respective owners. Use of these trademarks does not imply endorsement or affiliation. Rev 10/20/26

AC 4DR 4.5″ Downlight - Round

AGILE-CORE®
Distributed Edge Architecture

TRIM TYPE DETAILS

OPEN



OPEN TOP DIFFUSER



OPEN (WALL WASH)



FLUSH | SHOWER



ANGLED



REGRESSED



REFLECTOR FINISH DETAILS

SPC Clear specular



SG Satin glow

PW Pewter

GD Gold

CG Champagne gold

RG Rose gold

CS Clear semi-specular

WH White

BL Black

MOUNTING TYPE DETAILS

NEW CONSTRUCTION



IC-RATED





REMODEL
CROSS SECTION
P15 – P44 lumens shown



	Length					
Lumens	**A**	**B**	**C**	**D**	**E**	**F**
P15	15-3/16″	16″	6-3/8″	12-1/8″	9-1/2″	6-1/16″
P28	16-5/8″	17-1/2″	7-7/8″	14″	10-1/4″	7″

SINCLAIR DIGITAL

©2026 Sinclair Digital Services, Inc. | 817.255.4015 | www.sinclair-digital.com
Specifications subject to change without notice. All trademarks, product names, logos, and brands mentioned are the property of their respective owners. Use of these trademarks does not imply endorsement or affiliation. Rev 10/20/26

MOUNTING HARDWARE DETAILS

F1 Integral 2-position fixed pan bracket, universal bar hanger included

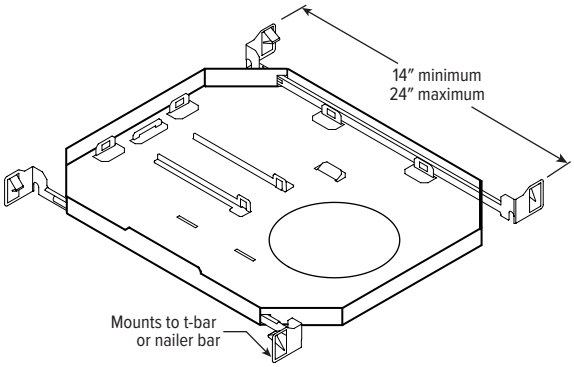

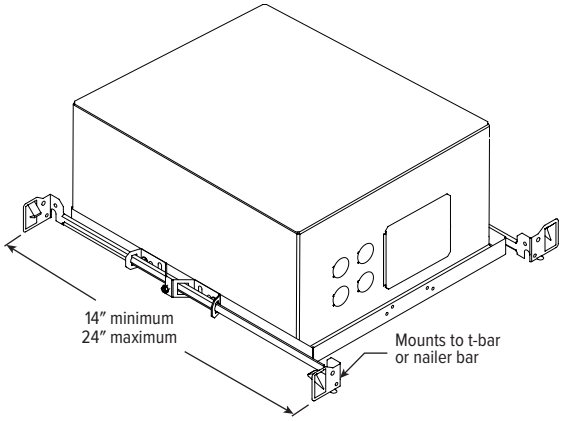

F1 with I Mounting Type

BA1 Adjustable butterfly pan bracket, bar hanger not included (N Mounting Type only)



BA2 Adjustable butterfly pan bracket, heavy-duty universal bar hanger included (N Mounting Type only)

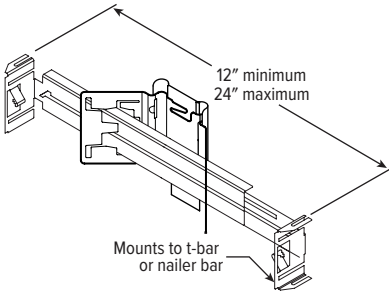

CA1 Adjustable caterpillar pan bracket, universal bar hanger included (N Mounting Type only)

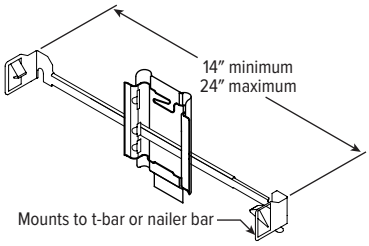

CA2 Adjustable caterpillar pan bracket, t-bar hanger included (N Mounting Type only)

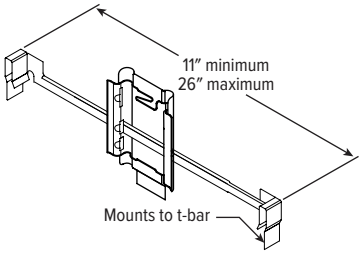

©2026 Sinclair Digital Services, Inc. | 817.255.4015 | www.sinclair-digital.com
Specifications subject to change without notice. All trademarks, product names, logos, and brands mentioned are the property of their respective owners. Use of these trademarks does not imply endorsement or affiliation. Rev 10/20/26

AC 4DR 4.5″ Downlight - Round

AGILE-CORE®
Distributed Edge Architecture

AGILE-CORE POWER DISTRIBUTION AND CONTROL SYSTEM

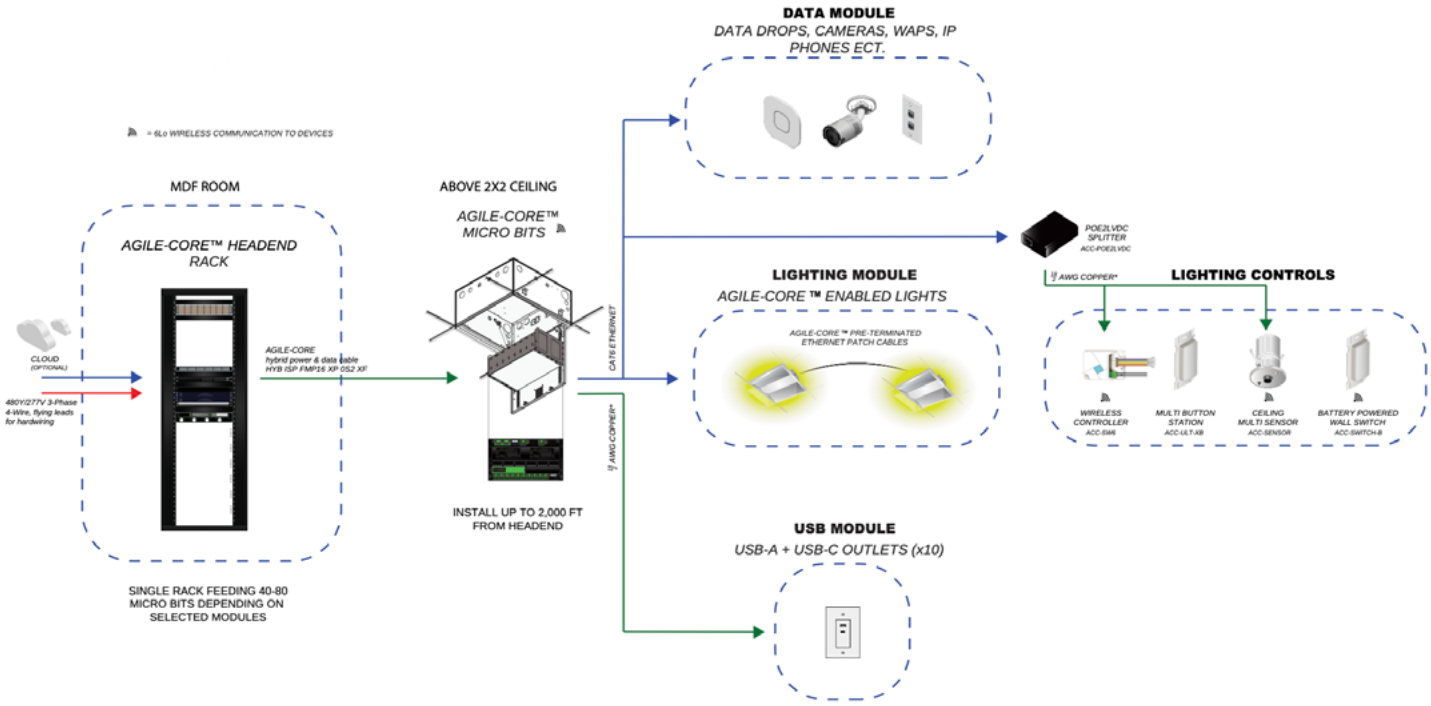

SINCLAIR DIGITAL

©2026 Sinclair Digital Services, Inc. | 817.255.4015 | www.sinclair-digital.com
Specifications subject to change without notice. All trademarks, product names, logos, and brands mentioned are the property of their respective owners. Use of these trademarks does not imply endorsement or affiliation. Rev 10/20/26