

Exit Signage

PROJECT:	QTY:
TYPE:	CATALOG:



**THERMOPLASTIC
EXIT SIGN**
Series BLD



**DOWNLIGHT
THERMOPLASTIC COMBO**
Series CLP



**THIN THERMOPLASTIC
COMBO**
Series CTX

SPECIFICATIONS:

Housing	- Thermoplastic in white or black finish - Universal single/double face - Injection-molded 5VA flame retardant - High-impact resistant
Electrical	24VDC 48VDC option available
Mounting	- EZ-snap mounting canopy includd for top or end mount - Universal knockout pattern on back plate for wall mount
Listings	- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes - UL Listed for damp locations (0°C – 50°C) - Certified to CEC under Title 20 Regulations
Warranty	5-year limited warranty

FEATURES:

- No in-luminaire drivers or batteries for extended fixture life
- Daisy chain multiple fixtures per home run
- Units operate at 24VDC (with 48VDC option available for select models)
- Low voltage flying leads for fast low voltage connections
- Class 2 exit signage

CERTIFICATIONS



ORDERING GUIDE:

Example Catalog # AC BLD REC U G W

Family	# of Faces	Letter Color	Housing Color	Options
AC BLD REC	U Universal single/double face	R Red G Green	W White B Black	48 USA Buy American Act compliant


Example Catalog # AC CTX REC U R W

Family	# of Faces	Letter Color	Housing Color	Options
AC CTX REC	U Universal single/double face	R Red G Green	W White B Black	48


Example Catalog # AC CLP REC U R W

Family	# of Faces	Letter Color	Housing Color	Options
AC CLP REC	U Universal single/double face	R Red G Green	W White B Black	48 USA Buy American Act compliant


FIXTURE DETAILS

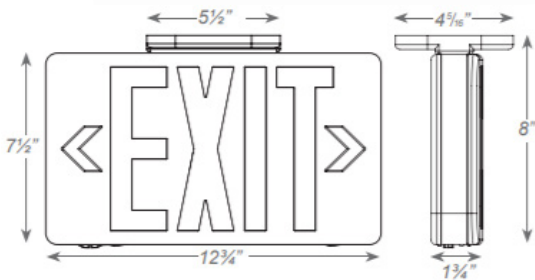

THERMOPLASTIC EXIT SIGN
Series BLD

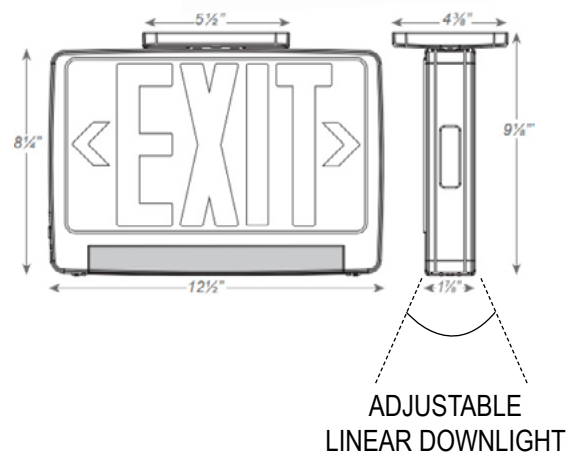

**DOWNLIGHT
THERMOPLASTIC COMBO**
Series CLP

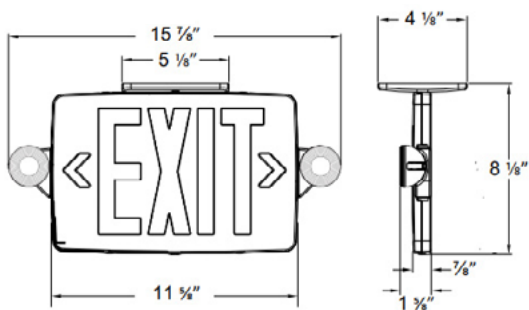

THIN THERMOPLASTIC COMBO
Series CTX

AGILE-CORE POWER DISTRIBUTION AND CONTROL SYSTEM

